


# ***PPC #620***

## ***Window Protection Film***

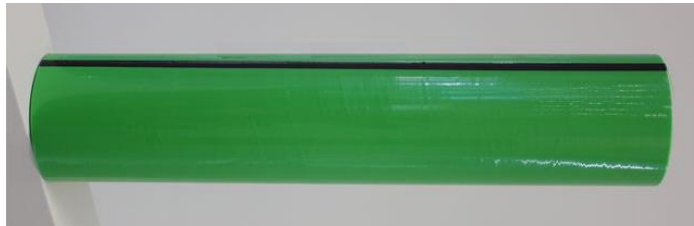

**Self Adhesive – Easy to apply – Easy to remove for up to 6 months**

### **Product Construction:**

- A 50 micron Polyethylene film with a solvent based acrylic adhesive.

### **Product Dimensions:-**

- Available 1220mm wide x 100mts or 200 mts long.

### **Product Details:-**


- A self-adhesive temporary glass protection film
- Suitable both for internal and external use
- Prevents paint and mortar splashes from coming in direct contact with window frames and glass during building construction.
- Reduces clean up time prior to hand over

### **Product Features:-**

- Easily applied by hand
- Residue free after removal
- Puncture and tear resistant
- Conformable

# ***PPC #620***

## ***Window Protection Film***

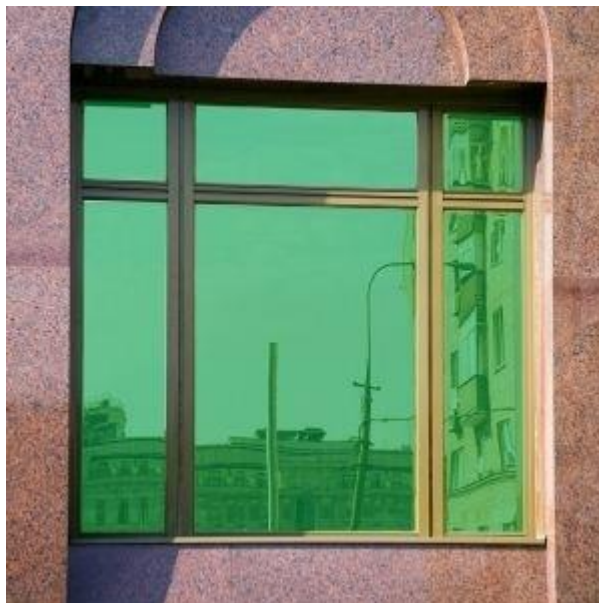

### **Technical Data**

Principle Composition	50 micron P.E. film with a solvent acrylic adhesive
Colour	Green
UV Resistance	Good up to 6 months
Adhesive Strength	370-430g/50mm
Elongation	300%

### **Application**

Application Temperature	Above 10 degrees C
Surface preparation	Clean surface to remove any moisture, oil, dust or surface contaminant
Temperature Resistance	60 Degrees for 160 hours with no residue on removal.
Clean up.	Dispose of waste in recycle receptacle

### **Storage**

Temperature	Moderate Conditions
Shelf Life	1 year in sealed carton.

## **PRECISION PAPER COATINGS PTY LTD**

25 MIO WERA ROAD, VILLAWOOD NSW 2163 AUSTRALIA

[sales@ppcpl.com.au](mailto:sales@ppcpl.com.au)

TEL: 61 2 9780 9000

FAX: 61 2 9728 9966

[www.ppcpl.com.au](http://www.ppcpl.com.au)